

# ROOFING CHECKLIST

A typical roofing project might include all or most of the following items.

Use this list as a handy reminder when you do an estimate or place your order with Erie Materials.

## ROOFING CHECKLIST

- \_\_\_\_\_ Shingles
- \_\_\_\_\_ Starter
- \_\_\_\_\_ Underlayment
- \_\_\_\_\_ Hip/Ridge
- \_\_\_\_\_ Ice & Water Protection
- \_\_\_\_\_ Cement
- \_\_\_\_\_ Brushes/Trowels
- \_\_\_\_\_ Pipe Flashing Boots
- \_\_\_\_\_ Roll Flashing
- \_\_\_\_\_ Step Flashing
- \_\_\_\_\_ Drip Edge
- \_\_\_\_\_ Roof Vents
- \_\_\_\_\_ Ridge Vent
- \_\_\_\_\_ Ridge Vent Connectors
- \_\_\_\_\_ Ridge Vent End Plugs
- \_\_\_\_\_ Nails
- \_\_\_\_\_ Staples
- \_\_\_\_\_ Plywood/OSB
- \_\_\_\_\_ Zip Roof Panels

# ROOFING TAKE-OFF FORM



DOWNLOAD  
HERE

CONTRACTOR: \_\_\_\_\_

CONTACT #: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

DELIVERY ADDRESS: \_\_\_\_\_

DELIVERY DATE: \_\_\_\_\_

DELIVERY TIME: \_\_\_\_\_

PO # \_\_\_\_\_

		PRICE	EXTENSION
SHINGLES			
STARTER SHINGLES	HIPS/ RIDGE		
UNDERLAYMENT	CAP NAILS		
ICE & WATER			
DRIP EDGE			
FLASHING	5X7 / 3X8		
VENTS			
PLYWOOD & ZIP	SKYLIGHTS		
HAND NAILS	COIL NAILS		
FLASHING/ CURBS	FLANGES (PIPE BOOTS)		
CEMENT	STAPLES		
TORCH DOWN (APP) PEEL & STICK	BASE SHEET		
BOOM TRUCK NEEDED?	<input type="checkbox"/> YES <input type="checkbox"/> NO	SUB-TOTAL	
MISC		TAX	
		TOTAL	

STEEP-SLOPE ROOFING



ALBANY | AUBURN | BINGHAMTON | ELMIRA | SCRANTON | SYRACUSE | UTICA | WATERTOWN | WILLIAMSPORT



CERTAINTEED: LUXURY SHINGLES

# Grand Manor®



[certainteed.com](http://certainteed.com)

Stonegate Gray

Black Pearl

Brownstone

Colonial Slate

Gatehouse Slate

Georgian Brick

Sherwood Forest

Stonegate Gray

Weathered Wood

## Enhanced Limited Lifetime Warranty

+ 10-Year SureStart™ Protection  
Material, Labor, Tear-Off and Disposal

- 18" x 36", 8" exposure
- 2 full-size, fiberglass-base shingles with randomly applied tabs
- Authentic depths and dimensions of natural slate
- Virtual five-layer coverage when applied
- 30-year StreakFighter™ warranty
- 15-year 110-mph wind-resistance warranty – 130-mph upgrade available
- Starter: High-Performance Starter
- Hip/Ridge: Shangle Ridge

*See warranty for specific details and limitations.*

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

### Fire Resistance:

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

### Wind Resistance:

- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

### Impact Resistance:

- US2218 Class 4

### Tear Resistance:

- UL-certified to meet ASTM D3462
- CSA standard A123.5

### Wind-Driven-Rain Resistance:

- Miami-Dade Product Control Acceptance

### Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



COLORVIEW®  
VISUALIZER

**!**  
**ALWAYS**  
SELECT COLOR  
FROM PRODUCT SAMPLES

SPECIAL  
ORDER



Presidential Shake in  
Charcoal Black

## Enhanced Limited Lifetime Warranty

+ 10-Year SureStart™ Protection  
Material, Labor, Tear-Off and Disposal

## Presidential Shake® TL



Aged Bark




Autumn Blend



Charcoal Black



Country Gray



Shadow Gray

- 14-1/4" x 40", 4" exposure
- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 30-year StreakFighter™ warranty
- 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
- Starter: Presidential Starter
- Hip/Ridge: Cedar Crest

*See warranty for specific details and limitations.*

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

### Fire Resistance:

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

### Wind Resistance:

- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

### Tear Resistance:

- UL-certified to meet ASTM D3462
- CSA standard A123.5

### Wind-Driven-Rain Resistance:

- Miami-Dade Product Control Acceptance


### Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537


## Presidential Shake®



Aged Bark



Autumn Blend



Charcoal Black



Shadow Gray



Weathered Wood



Classic Weathered Wood

- 14-1/4" x 40", 4" exposure
- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 30-year StreakFighter™ warranty
- 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
- Starter: Presidential Starter
- Hip/Ridge: Cedar Crest

*See warranty for specific details and limitations.*

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

### Fire Resistance:

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

### Wind Resistance:

- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

### Tear Resistance:

- UL-certified to meet ASTM D3462
- CSA standard A123.5

### Wind-Driven-Rain Resistance:

- Miami-Dade Product Control Acceptance

### Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



SPECIAL  
ORDER



CERTAINTEED: LUXURY SHINGLES

## Carriage House®


 certainteed  
SAINT-GOBAIN

certainteed.com

Black Pearl

Brownstone

Colonial Slate

Gatehouse Slate

Georgian Brick

Sherwood Forest

Stonegate Gray

Victorian Blue

Sherwood Forest

## Enhanced Limited Lifetime Warranty

+ 10-Year SureStart™ Protection  
Material, Labor, Tear-Off and Disposal

- 18" x 36", 8" exposure
- Two full-size, fiberglass-base shingles
- Unique chamfered cut for scalloped appearance
- 4-layer coverage when applied
- 30-year StreakFighter™ warranty
- 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
- Starter: Carriage House Shingle (8" exposed portion removed)
- Hip/Ridge: Shingle Ridge

See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

**Fire Resistance:**

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

**Wind Resistance:**

- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

**Tear Resistance:**

- UL-certified to meet ASTM D3462
- CSA standard A123.5

**Impact Resistance:**

- US2218 Class 4

**Wind-Driven-Rain Resistance:**

- Miami-Dade Product Control Acceptance

**Quality Standards:**

- ICC-ES-ESR-1389 & ESR-3537



COLORVIEW®  
VISUALIZER



SPECIAL  
ORDER



Colonial Slate

### Enhanced Limited Lifetime Warranty

+ 10-Year SureStart™ Protection  
Material, Labor, Tear-Off and Disposal

- 18" x 36", 8" exposure
- One full-size, fiberglass-base shingle with randomly applied tabs
- 30-year StreakFighter™ warranty
- 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
- CertainTeed Starter and hip and ridge accessory available
- **Starter:** High-Performance Starter
- **Hip/Ridge:** Cedar Crest or Shangle Ridge

See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### Tear Resistance:

- UL-certified to meet ASTM D3462

#### Impact Resistance:

- All colors available in a version that meets UL2218 Class 43 or Class 4



Black Granite

Colonial Slate

Gatehouse Slate

Shenandoah

Stonegate Gray

Weathered Wood

SPECIAL  
ORDER



CERTAINTEED: DESIGNER SHINGLES

## Landmark® Premium

certainteed  
SAINT-GOBAIN

certainteed.com

Max Def Pewterwood

## Enhanced Limited Lifetime Warranty

+ 10-Year SureStart™ Protection  
Material, Labor, Tear-Off and Disposal

- 13-1/4" x 38-3/4", 5-5/8" exposure
- Two-piece laminated fiberglass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 30-year StreakFighter™ warranty
- 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
- Starter: SwiftStart
- Hip/Ridge: Cedar Crest or Shadow Ridge

See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

**Fire Resistance:**

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

**Wind Resistance:**

- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

**Tear Resistance:**

- UL-certified to meet ASTM D3462
- CSA standard A123.5

**Quality Standards:**

- ICC-ES-ESR-1389 & ESR-3537

COLORVIEW®  
VISUALIZER

Max Def Burnt Sienna

Max Def Colonial Slate

Max Def Driftwood

Max Def Moire Black

Max Def Pewterwood

Max Def Weathered Wood

SPECIAL  
ORDER



Max Def Moire Black

**Enhanced Limited Lifetime Warranty**

+ 10-Year SureStart™ Protection  
Material, Labor, Tear-Off and Disposal

IN  
STOCK

- 13-1/4" x 38-3/4", 5-5/8" exposure
  - Two-piece laminated fiberglass-base construction
  - Classic shades and dimensional appearance of natural wood or slate
  - 30-year StreakFighter™ warranty
  - 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
  - **Starter:** SwiftStart
  - **Hip/Ridge:** Cedar Crest or Shadow Ridge
- See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

**Fire Resistance:**

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

**Wind Resistance:**

- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

**Impact Resistance:**

- UL 2218 Class 3

**Tear Resistance:**

- UL-certified to meet ASTM D3462
- CSA standard A123.5

**Quality Standards:**


- ICC-ES-ESR-1389 & ESR-3537



Max Def Burnt Sienna



Max Def Heather Blend



Max Def Charcoal Black  
AVAILABLE ONLY IN  
ALBANY & SCRANTON



Max Def Moire Black



Max Def Coastal Blue



Max Def Pewter  
NOT AVAILABLE IN  
ALBANY & SCRANTON




Max Def Cobblestone Gray



Max Def Pewterwood  
AVAILABLE ONLY IN  
ALBANY & SCRANTON



Max Def Colonial Slate




Max Def Prairie Wood  
NOT AVAILABLE IN  
ALBANY & SCRANTON



Max Def Driftwood



Max Def Red Oak



Max Def Espresso



Max Def Resawn Shake



Max Def Evergreen



Max Def Shenandoah



Max Def Georgetown Gray



Max Def Weathered Wood

SPECIAL  
ORDER

NEW COLORS



CERTAINTEED: DESIGNER SHINGLES

## Highland Slate®

certainteed  
SAINT-GOBAIN

certainteed.com

Smokey Quartz

## Enhanced Limited Lifetime Warranty

+ 10-Year SureStart™ Protection  
Material, Labor, Tear-Off and Disposal

- 18" x 36", 8" exposure
  - Single-layer fiberglass-based construction
  - Blended shades and dimensional appearance of natural slate
  - 25-year StreakFighter™ warranty
  - 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
  - **Starter:** High-Performance Starter or shingle with 8" lower portion removed
  - **Hip/Ridge:** Cedar Crest or Shangle Ridge
- See warranty for specific details and limitations.*

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

**Fire Resistance:**

- UL 790 Class A
- UL-certified to meet ASTM D3018 Type 1
- ASTM E 108 Class A

**Wind Resistance:**

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

**Tear Resistance:**

- UL-certified to meet ASTM D3462
- CSA standard A123.5

**Quality Standards:**

- ICC-ES-ESR-1389 & ESR-3537

COLORVIEW®  
VISUALIZER

Black Granite

Fieldstone

New England Slate

Smokey Quartz

Max Def Weathered Wood

SPECIAL  
ORDER



Driftwood

## Enhanced Limited Lifetime Warranty

+ 10-Year SureStart™ Protection  
Material and Labor

- 13-1/4" x 38-3/4", 5-5/8" exposure
- 2-piece laminated fiberglass-base construction
- Classic shades and dimensional appearance of natural wood or slate
- 25-year StreakFighter™ Warranty
- 15-year 110-mph wind-resistance warranty; 130-mph upgrade available
- Starter: SwiftStart
- Hip/Ridge: Cedar Crest or Shadow Ridge

See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

### Fire Resistance:

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

### Wind Resistance:



- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

### Tear Resistance:

- UL-certified to meet ASTM D3462
- CSA standard A123.5

### Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537





CERTAINTEED: TRADITIONAL SHINGLES

XT25™


 certainteed
   
SAINT-GOBAIN

certainteed.com

Moire Black

- Fiberglass composition
  - Designed for long-lasting performance and durability
  - 12" x 36", 5" exposure
  - 25-year limited transferable warranty
  - 10-year StreakFighter™ warranty
  - 5-year SureStart™ protection
  - 5-year 60-mph wind-resistance warranty
- See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and compliance with the following industry standards:

**Fire Resistance:**

- UL Class A
- UL-certified to meet ASTM D3018 Type 1

**Wind Resistance:**


- UL-certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

**Tear Resistance:**

- UL-certified to meet ASTM D3462
- CSA standard A123.5

**Quality Standards:**

- ICC-ES-ESR-1389 & ESR-3537



XT25 shingles are stocked on a limited basis.  
Please call your local Erie Materials branch  
for availability.





Available Colors

**Antique Slate**  
(less contrast than English Gray)

**English Gray**

**Royal Slate**

**Weathered Slate**



Color Shown:  
Antique Slate

**Slateline® Shingles: Bold shadow lines and tapered cut-outs create the look of slate at a fraction of the cost**



Scan this QR Code to  
learn more about  
Advanced Protection



### Highest Roofing Fire Rating

UL Class A, Listed to ANSI/UL 790.

### Stays in Place

Dura Grip™ Adhesive seals each shingle tightly and reduces the risk of shingle blow-off. Shingles warranted to withstand winds up to 130 mph (209 km/h).<sup>1</sup>

### Peace of Mind

Lifetime limited transferable warranty with Smart Choice® Protection (non-prorated material and installation labor coverage) for the first ten years.<sup>2</sup>

### Perfect Finishing Touch

Use Timberex® Premium Ridge Cap Shingles.

### Premium Color Blends

Combine our latest granule colors with GAF's advanced blending technology, resulting in exceptionally vibrant, premium color options.

### High Performance

Designed with Advanced Protection® Shingle Technology, which reduces the use of natural resources while providing excellent protection for your home.

### 25-Year StainGuard Plus™ Algae Protection Limited Warranty<sup>4</sup>

Proprietary GAF Time-Release Algae-Fighting Technology helps protect your shingles from unsightly stains.

### Product/System Specifics

- Fiberglass asphalt construction
- Dimensions (approx.): 17"x40" (431.8 x 1016mm)
- Exposure: 7 1/2" (190.5mm)
- Bundles/sq: 3
- Pieces/square: 48
- StainGuard Plus™ Algae Protection Limited Warranty<sup>4</sup>
- Limited Warranty
- Hip/Ridge: TimberTex<sup>®3</sup>
- Starter: WeatherBlocker™

### Applicable Standards & Protocols:

- UL listed to ANSI/UL 790 Class A
- UL997 modified to 100mph
- State of Florida approved
- Classified by UL in accordance with ICC-ES AC438
- Meets ASTM D3018, Type 1
- Meets ASTM D3161, class F
- Meets ASTM D3462<sup>5</sup>
- Meets ASTM D7158, Class H
- Miami-Dade County Product Control Approved
- Meets Texas Department of Insurance Evaluation

<sup>1</sup> This wind speed coverage requires special installation; see GAF Shingle & Accessory Limited Warranty for details.

<sup>2</sup> See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. The word "Lifetime" refers to the length of coverage provided by the GAF Shingle & Accessory Limited Warranty and means as long as the original individual owner(s) of a single-family detached residence (or the second owner(s) in certain circumstances) owns the property where the shingles are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable.

<sup>3</sup> These products are not available in all areas. See [www.gaf.com/ridgecapavailability](http://www.gaf.com/ridgecapavailability) for details.

<sup>4</sup> 25-year StainGuard Plus™ Algae Protection Limited Warranty against blue-green algae discoloration is available only on products sold in packages bearing the StainGuard Plus™ logo. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

<sup>5</sup> Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

<sup>6</sup> Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence (or eligible second owner(s)) owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires use of GAF Lifetime shingles only. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. Lifetime coverage on shingles and accessories requires use of any GAF Lifetime Shingle and at least 3 qualifying GAF accessories. See GAF Shingle & Accessory Limited Warranty (italics) for complete coverage and restrictions. Visit [gaf.com/LRS](http://gaf.com/LRS) for qualifying GAF products. For installations not eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle & Accessory Limited Warranty.



## GAF: LIFETIME SHINGLES



Available Colors

Color Shown:  
Cedar Falls

To make a bold color statement with your new roof, explore the vibrant contrasting hues of the Timberline HDZ® Harvest Blend Color Collection.



Scan this QR Code to learn more about StainGuard® Plus Algae Protection Limited Warranty¹



¹ 25-year StainGuard Plus™ Algae Protection Limited Warranty against blue-green algae discoloration is available only on products sold in packages bearing the StainGuard Plus™ logo. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

² Results based on study conducted by Home Innovation Research Labs, an independent research lab, comparing installation of Timberline HDZ® Shingles to Timberline HDZ® Shingles on a 16-square foot deck using standard 4-nail nailing pattern under controlled laboratory conditions. Actual results may vary.

³ 15-year WindProven™ limited wind warranty on Timberline® AH Shingles requires the use of GAF Starter Strips, Roof Deck Protection, Ridge Cap Shingles, and Leak Barrier or Attic Ventilation. See GAF Roofing System Limited Warranty for complete coverage and restrictions. Visit [gaf.com/URS](http://gaf.com/URS) for qualifying GAF products.

⁴ These products are not available in all areas. See [www.gaf.com/ridgecapavailability](http://www.gaf.com/ridgecapavailability) for details.

⁵ Applies to some plants (that make referenced product).

⁶ Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

⁷ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence (or eligible second owner(s)) owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires use of GAF Lifetime shingles only. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. Lifetime coverage on shingles and accessories requires use of any GAF Lifetime Shingle and at least 3 qualifying GAF accessories. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. Visit [gaf.com/URS](http://gaf.com/URS) for qualifying GAF products. For installations not eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle & Accessory Limited Warranty.

Note: It is difficult to reproduce the color clarity and actual color blends of these products. Before selecting your color, please ask to see several full-size shingles. Color availability may vary, ask an associate for details.

**Custom-designed color palette**

Professionally designed color palette featuring subtle blends with contrasting colors.

**Extra-dimensional**

Optimized construction and advanced color application techniques result in an extra-dimensional look.

**LayerLock™ Technology**

Mechanically fuses the common bond between overlapping shingle layers.

**Up to 99.9% nailing accuracy**

The StrikeZone™ nailing area is so easy to hit that 999 out of 1,000 nails were placed correctly in testing.²

**WindProven™ Limited Wind Warranty**

Timberline HDZ® Shingles are eligible for a wind warranty with no maximum wind speed limitation.³

**Dura Grip™ sealant**

Pairs with the smooth microgranule surface of the StrikeZone™ nailing area for fast tack. Then, an asphalt-to-asphalt monolithic bond cures for durability, strength, and exceptional wind uplift performance.

**25-Year StainGuard Plus™ Algae Protection Limited Warranty¹**

Proprietary GAF Time-Release Algae-Fighting Technology helps protect your shingles from unsightly stains.

**High performance**

Designed with Advanced Protection® Shingle Technology.

**Perfect finishing touch**

For the best look, use TimberTex® Premium Ridge Cap Shingles⁴

**Product/System Specifics**

- Fiberglass asphalt construction
- Dimensions (approx.): 13 1/4" x 39 3/8" (336.5 x 1,001.1 mm)
- Exposure: 5 5/8" (142.88 mm)
- Bundles/Square: 3
- StainGuard Plus™ Algae Protection Limited Warranty¹
- Hip/Ridge: TimberTex®; Seal-A-Ridge®
- Starter: Pro-Start®; WeatherBlocker™; QuickStart®

**Applicable Standards & Protocols:**

- UL Listed to ANSI/UL 790 Class A
- Miami-Dade County Product Control approved
- State of Florida approved⁵
- Classified by UL in accordance with ICC-ES AC438
- Meets ASTM D7158, Class H
- Meets ASTM D3161, Class F
- Meets ASTM D3018, Type 1
- Meets ASTM D3462⁶
- ICC-ES Evaluation Reports ESR-1475 and ESR-3267
- Texas Department of Insurance listed







Available Colors

Barkwood	Biscayne Blue
Charcoal	Fox Hollow Gray
Hickory	Hunter Green
Mission Brown	Oyster Gray
Patriot Red	Pewter Gray
Shakewood	Slate
Weathered Wood	Williamsburg Slate



Color Shown:  
Weathered Wood

America's #1-selling shingle just got better! The same shingle you know and love, now with LayerLock™ Technology and GAF Time-Release Algae-Fighting Technology.



Up to 99.9%  
nailing accuracy  
with StrikeZone™  
nailing area  
Compared to Timberline®  
HD Shingles



Scan this QR Code to  
learn more about  
Timberline HDZ® Shingles

<sup>1</sup> Results based on study conducted by Home Innovation Research Labs, an independent research lab, comparing installation of Timberline HDZ® Shingles to Timberline HDZ® Shingles on a 16-square roof deck using standard 4-nail nailing pattern under controlled laboratory conditions. Actual results may vary.

<sup>2</sup> 15-year WindProven™ limited wind warranty on Timberline HDZ® shingles requires the use of GAF Starter Strips, Roof Deck Protection, Ridge Cap Shingles, and Leak Barrier or Attic Ventilation. See GAF Roofing System Limited Warranty for complete coverage and restrictions. Visit [gaf.com/LRS](http://gaf.com/LRS) for qualifying GAF products.

<sup>3</sup> 25-year StainGuard Plus™ Algae Protection Limited Warranty against blue-green algae discoloration is available only on products sold in packages bearing the StainGuard Plus™ logo. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

<sup>4</sup> These products are not available in all areas. See [www.gaf.com/ridgecapavailability](http://www.gaf.com/ridgecapavailability) for details.

<sup>5</sup> Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

<sup>6</sup> Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence (or eligible second owner(s)) owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires use of GAF Lifetime Shingles only. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. Lifetime coverage on shingles and accessories requires use of any GAF Lifetime Shingle and at least 3 qualifying GAF accessories. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. Visit [gaf.com/LRS](http://gaf.com/LRS) for qualifying GAF products. For installations not eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle & Accessory Limited Warranty.

Note: It is difficult to reproduce the color clarity and actual color blends of these products. Before selecting your color, please ask to see several full-size shingles. Color availability may vary, ask an associate for details.

### LayerLock™ Technology

Mechanically fuses the common bond between overlapping shingle layers.

### Up to 99.9% nailing accuracy

The StrikeZone™ nailing area is so easy to hit that 999 out of 1,000 nails were placed correctly in testing.<sup>1</sup>

### WindProven™ Limited Wind Warranty

Timberline HDZ® Shingles are eligible for a wind warranty with no maximum wind speed limitation.<sup>2</sup>

### Dura Grip™ sealant

Pairs with the smooth microgranule surface of the StrikeZone™ nailing area for fast tack. Then, an asphalt-to-asphalt monolithic bond cures for durability, strength, and exceptional wind uplift performance.

### 25-Year StainGuard Plus™ Algae Protection Limited Warranty<sup>3</sup>

Proprietary GAF Time-Release Algae-Fighting Technology helps protect your shingles from unsightly stains.

### High Performance

Designed with Advanced Protection® Shingle Technology.

### Perfect Finishing Touch

For the best look, use TimberTex® Premium Ridge Cap Shingles.<sup>4</sup>

### Product/System Specifics

- Fiberglass asphalt construction
- Dimensions (approx.): 13 1/4" x 39 3/8" (337 x 1,000 mm)
- Exposure: 5 5/8" (143 mm)
- Bundles/Square: 3
- Pieces/Square: 64
- StainGuard Plus™ Algae Protection Limited Warranty<sup>3</sup>
- Hip/Ridge: TimberTex®; Seal-A-Ridge®
- Starter: Pro-Start®; QuickStart®; WeatherBlocker™

### Applicable Standards & Protocols:

- UL Listed to ANSI/UL 790 Class A
- State of Florida approved
- Classified by UL in accordance with ICC-ES AC438
- Meets ASTM D7158, Class H
- Meets ASTM D3161, Class F
- Meets ASTM D3018, Type 1
- Meets ASTM D3462<sup>5</sup>
- Miami-Dade County Product Control approved
- ICC-ES Evaluation Reports ESR-1475 and ESR-3267
- Meets Texas Department of Insurance Requirements

(U.S. Only). Rated by the CRRC. Can be used to comply with Title 24 cool roof requirements

© 2021 GAF



**IKO** | **Armourshake™**

SPECIAL ORDER

**ALGAE RESISTANT**  
IKO PERFORMANCE

PERFORMANCE NEVER LOOKED SO GOOD

**CLASS 3** IMPACT RESISTANT PERFORMANCE SHINGLES

**CLASS 4** IMPACT RESISTANT PERFORMANCE SHINGLES  
(Shadow Black only)



HI-DEF COLORS



IKO ADVANTAGE SIZE



CLASS A FIRE RESISTANCE RATING



FASTLOCK® SEALANT

**SPECIFICATIONS**<sup>5</sup>

Limited Warranty <sup>1</sup>	Limited Lifetime <sup>3</sup>	Dimensions (L x W)	37 3/8 in (950 mm) x 18 11/16 in (475 mm)
Iron Clad Protection <sup>1</sup>	15 Years	Exposure	5 1/2 in (140 mm)
Limited Wind Warranty <sup>1</sup>	110 mph (177 km/h)	Approximate Coverage	Class 3 & Class 4 – 5 bds/sq
Limited High Wind Warranty Upgrade <sup>1,2</sup>	130 mph (210 km/h)	Shingles Per Square	70
Blue-Green Algae Resistant <sup>1</sup>	Yes		

**STANDARDS**<sup>6</sup>

ASTM D3462	ASTM D3018
ASTM D7158 – Class H	ASTM D3161 – Class F
ASTM E108/UL 790 – Class A	CSA A123.5
FM 4473 – Class 3 <sup>4</sup> Class 4 <sup>4</sup> is also available (Shadow Black only)	



**IKO** | **Crowne Slate™**

SPECIAL ORDER

**ALGAE RESISTANT**  
IKO PERFORMANCE

PERFORMANCE NEVER LOOKED SO GOOD

**CLASS 4** IMPACT RESISTANT PERFORMANCE SHINGLES



10" EXPOSURE



HI-DEF COLORS



CLASS A FIRE RESISTANCE RATING



FULL COVERAGE  
(100 SQ FT/4 BUNDLES)

**SPECIFICATIONS**<sup>5</sup>

Limited Warranty <sup>1</sup>	Limited Lifetime <sup>3</sup>	Dimensions (L x W)	39 1/2 in (1003 mm) x 13 1/4 in (336 mm)
Iron Clad Protection <sup>1</sup>	15 Years	Exposure	10 in (254 mm)
Limited Wind Warranty <sup>1</sup>	110 mph (177 km/h)	Coverage Per Bundle	25 ft <sup>2</sup> (2.32 m <sup>2</sup> )
Limited High Wind Warranty Upgrade <sup>1,2</sup>	130 mph (210 km/h)	Shingles Per Square	40
Blue-Green Algae Resistant <sup>1</sup>	Yes		

**STANDARDS**<sup>6</sup>

ASTM D3462	ASTM D3018
ASTM D7158 – Class H	ASTM D3161 – Class F
ASTM E108/UL 790 – Class A	FM 4473 – Class 4 <sup>1</sup>



**IKO** | **Royal Estate™**

SPECIAL ORDER

**ALGAE RESISTANT**  
IKO PERFORMANCE

**CLASS 3** IMPACT RESISTANT PERFORMANCE SHINGLES



5 5/8" EXPOSURE



FASTLOCK® SEALANT



HI-DEF COLORS



CLASS A FIRE RESISTANCE RATING\*

**SPECIFICATIONS**<sup>5</sup>

Limited Warranty <sup>1</sup>	Limited Lifetime <sup>3</sup>	Dimensions (L x W)	40 in (1016 mm) x 13 1/4 in (336 mm)
Iron Clad Protection <sup>1</sup>	15 Years	Exposure	5 5/8 in (143 mm)
Limited Wind Warranty <sup>1</sup>	110 mph (177 km/h)	Coverage Per Bundle	33 1/3 ft <sup>2</sup> (3.1 m <sup>2</sup> )
Limited High Wind Warranty Upgrade <sup>1,2</sup>	130 mph (210 km/h)	Shingles Per Square	64
Blue-Green Algae Resistant <sup>1</sup>	Yes		

**STANDARDS**<sup>6</sup>

ASTM D3462	ASTM D3018
ASTM D7158 – Class H	ASTM D3161 – Class F
ASTM E108/UL 790 – Class A	



**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer**® tool may not accurately reflect shingle color and do not fully represent the entire color blend range nor the impact of sunlight.



IKO.COM



**Note:** Product and color availability may vary by region. Products with Miami Dade NOA and FBC product approval listings are available. Meets requirements of the Texas Department of Insurance. Please contact IKO for details. <sup>1</sup>See Limited Warranty at IKO.com for complete terms, conditions, restrictions and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. <sup>2</sup>High-wind application is required. <sup>3</sup>Lifetime means the period of time commencing on the date of the completion of the installation of the shingles on the building, and continuing so long as the owner or the first transferee owns the building on which the shingles were installed. <sup>4</sup>This impact rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer and damage from hail is not covered by the Limited Warranty. For further detail concerning the FM 4473 standards, visit the FM Approvals website. <sup>5</sup>All values shown are approximate. <sup>6</sup>Products are developed with reference to these standards.

All prices subject to change. Not responsible for typographical errors.  
See [eriematerials.com/updates](http://eriematerials.com/updates) for major price announcements.



ERIE MATERIALS.COM





iko.com

IKO: PERFORMANCE SHINGLES

# Dynasty® with ArmourZone®



## Dynasty® with ArmourZone®



IN STOCK AT OUR DISTRIBUTION CENTER AND  
READY FOR QUICK TRANSFER TO YOUR BRANCH



Color Featured: Glacier



HI-DEF  
COLORS



IKO  
ARMOURZONE®



HIGH-WIND  
RESISTANCE



FULL  
COVERAGE  
(100 SQ FT/3 BUNDLES)

SPECIFICATIONS <sup>4</sup>	Limited Warranty <sup>1</sup>	Limited Lifetime <sup>2</sup>	Dimensions (L x W)	40 7/8 in x 13 3/4 in	STANDARDS <sup>3</sup>	ASTM D3462
	Iron Clad Protection <sup>1</sup>	15 Years	Exposure	5 7/8 in		ASTM D3018
	Limited Wind Warranty <sup>1</sup>	130 mph	Coverage Per Bundle	33 1/3 ft <sup>2</sup>		ASTM D7158 – Class H
	Blue-Green Algae Resistant <sup>1</sup>	Yes	Shingles Per Square	60		ASTM D3161 – Class F
						ASTM E108/UL 790 – Class A
						FM 4473 – Class 3 <sup>3</sup>

### Performance Elevated.

IKO Dynasty shingles offer superior protection against wind uplift and water infiltration. Dynasty shingles are among the industry's heaviest thanks to a durable fiberglass mat covered with a thick coat of asphalt.

Dynasty features the ArmourZone, which offers unparalleled nail-holding power, helping the shingle resist high winds. And IKO's FastLock® sealant on every shingle further strengthens Dynasty's defiance of Mother Nature's wrath.

The secondary benefit of ArmourZone's larger nailing area is that it allows for easier and more accurate nailing. Combined with Dynasty's 5 7/8-inch exposure and larger-than-average overall size, it goes down faster and covers more area than most average-sized comparable laminate shingles.

They are available in IKO's exclusive hi-definition color blends that will make your customer's home the envy of the neighborhood.

GRANITE BLACK	SHADOW BROWN	CASTLE GREY AVAILABLE IN SELECT MARKETS	DRIFTSHAKE	GLACIER
CORNERSTONE WWD	FROSTONE GREY	BROWNSTONE	ATLANTIC BLUE <sup>6</sup>	BISCAYNE
MONACO RED	EMERALD GREEN	SENTINEL SLATE AVAILABLE IN SELECT MARKETS	SUMMIT GREY	

NEW COLOR



**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer®** tool may not accurately reflect shingle color and do not fully represent the entire color blend range nor the impact of sunlight.



IKO.COM

ERIEMATERIALS.COM

**Note:** <sup>1</sup>See Limited Warranty at IKO.com for complete terms, conditions, restrictions and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. <sup>2</sup>"Lifetime" means the period of time commencing on the date of the completion of the installation of the shingles on the building, and continuing so long as the Owner owns the building on which the shingles were installed. <sup>3</sup>This impact rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer and damage from hail is not covered by the Limited Warranty. For further detail concerning the FM 4473 standards, visit the FM Approvals website. <sup>4</sup>All values shown are approximate. <sup>5</sup>Products are developed with reference to these standards. <sup>6</sup>Blue granules may fade after extensive exposure to the sun's ultraviolet rays.

All prices subject to change. Not responsible for typographical errors.  
See [eriematerials.com/updates](http://eriematerials.com/updates) for major price announcements.





# IKO: ARCHITECTURAL SHINGLES

## Cambridge™



iko.com



# Cambridge®

IN STOCK



Color Featured: Dual Black



5 7/8" EXPOSURE



FASTLOCK® SEALANT



IKO® ADVANTAGE SIZE



FULL COVERAGE  
(100 SQ FT/3 BUNDLES)


SPECIFICATIONS <sup>1</sup>	Limited Warranty <sup>1</sup>	Limited Lifetime <sup>3</sup>	Dimensions (L x W)	40 7/8 in x 13 3/4 in	STANDARDS <sup>5</sup>	ASTM D3462
	Iron Clad Protection <sup>1</sup>	10 Years	Exposure	5 7/8 in		ASTM D3018
	Limited Wind Warranty <sup>1</sup>	110 mph	Coverage Per Bundle	33 1/3 ft <sup>2</sup>		ASTM D7158 – Class H
	Limited High Wind Warranty Upgrade <sup>1,2</sup>	130 mph	Shingles Per Square	60		ASTM D3161 – Class F
	Blue-Green Algae Resistant <sup>1</sup>	Yes				ASTM E108/UL 790 – Class A

### IKO's Most Popular Shingle Gives You an (Almost) Unfair Advantage.

IKO Cambridge architectural laminate shingles in our special Advantage size feature a 5 7/8" exposure that is bigger than most in their class. They go down fast and easy. And with full coverage, the job costs associated with extra bundles and the labor to install them are lowered too.

Proper installation is vital for effective weather resistance. That's why we've enlarged our nail line to guide installers for correct nail placement and have made our FastLock® sealant thick and aggressive to promote a strong bond.

Homeowners will enjoy the high-end designer architectural appearance without the high-end designer cost.

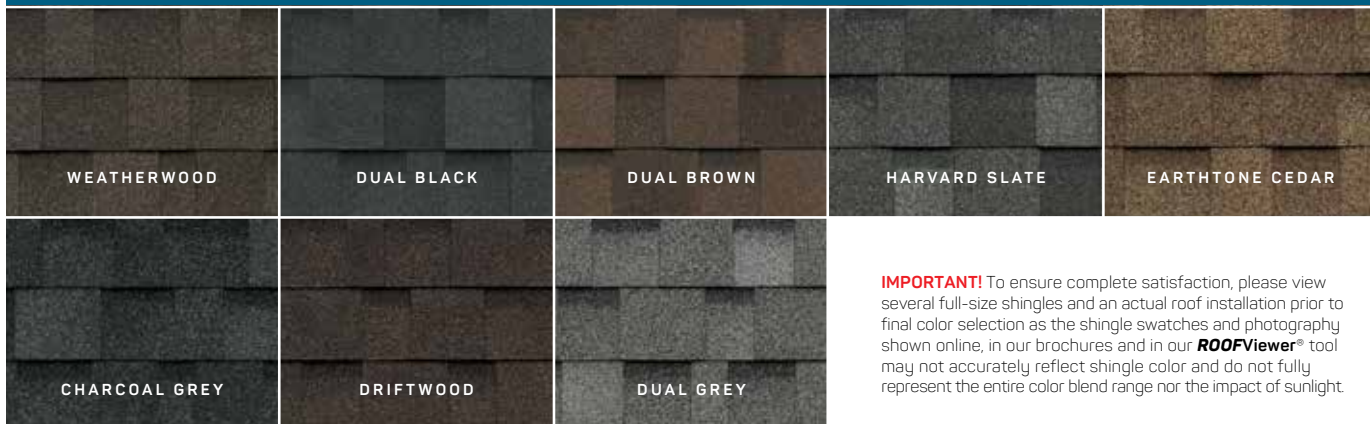

**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer®** tool may not accurately reflect shingle color and do not fully represent the entire color blend range nor the impact of sunlight.



IKO.COM

**Note:** <sup>1</sup>See Limited Warranty at IKO.com for complete terms, conditions, restrictions and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. <sup>2</sup>High-wind application is required. <sup>3</sup>Lifetime means the period of time commencing on the date of the completion of the installation of the shingles on the building, and continuing so long as the Owner or the first transferee owns the building on which the shingles were installed. <sup>4</sup>All values shown are approximate. <sup>5</sup>Products are developed with reference to these standards. <sup>6</sup>Available in select markets.







owenscorning.com


OWENS CORNING: ARCHITECTURAL SHINGLES

# TruDefinition® Duration® Designer Shingles


STEEP-SLOPE ROOFING




Aged Copper



Black Sable<sup>4</sup>



Bourbon<sup>5</sup>




Merlot



Pacific Wave



Sand Dune



Sedona Canyon



Storm Cloud



Summer Harvest

**SELECT COLORS STOCKED AT LOCAL BRANCHES. ALL COLORS AVAILABLE FOR QUICK TRANSFER TO YOUR LOCAL BRANCH.**

TruDefinition® Duration® Designer Shingles are specially formulated to provide dramatic color contrast and dimension to any roof and are available in all the popular colors. Beyond the impressive curb appeal, they also come with the advanced performance of patented SureNail® Technology — a technological breakthrough in roofing.

- Limited Lifetime Warranty<sup>\* ‡</sup>
- SureNail® Technology
- StreakGuard™ Protection with a 25-year Algae Resistance Limited Warranty<sup>3 §</sup>
- 130-mph Wind Resistance Limited Warranty<sup>\*</sup>
- Shingle size: 13-1/4" x 39-3/8"
- 5-5/8" application exposure
- ASTM D3462
- ASTM D228
- ASTM D3018 (Type 1)
- ICC-ES AC438
- ASTM D3161 (Class F Wind Resistance)
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- PRI ER 1378E01



ROOF VISUALIZER

<sup>\*</sup> See actual warranty for complete details, limitations and requirements.

<sup>‡</sup> 40-Year Limited Warranty on commercial projects.

<sup>#</sup> International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

<sup>3)</sup> Shingles are algae resistant to help control growth of algae and discoloration.

<sup>§</sup> Installation must include use of an approved Owens Corning® Hip & Ridge Shingle product. See actual warranty for details.

<sup>4)</sup> Owens Corning® Black Sable shingle includes a patented design.

<sup>5)</sup> Owens Corning® Bourbon and Midnight Plum shingles include a patent pending design.





OWENS CORNING: ARCHITECTURAL SHINGLES

# TruDefinition® Duration® Shingles



owenscorning.com

Colonial Slate



Brownwood



Onyx Black



Chateau Green




Peppercorn



Colonial Slate



Sand Castle



Desert Rose



Sierra Gray



Driftwood



Slatestone Gray



Estate Gray



Teak

Harbor Blue  
STOCKED IN  
ALBANY & SCRANTON

Terra Cotta

Midnight Plum<sup>5</sup>

Williamsburg Gray

IN  
STOCK

TruDefinition® Duration® Shingles are specially formulated to provide dramatic color contrast and dimension to any roof and are available in all the popular colors. Beyond the impressive curb appeal, they also come with the advanced performance of patented SureNail® Technology — a technological breakthrough in roofing.

- Limited Lifetime Warranty\* ‡
- SureNail® Technology
- StreakGuard™ Protection with a 25-year Algae Resistance Limited Warranty<sup>3§</sup>
- 130-mph Wind Resistance Limited Warranty\*
- Shingle size: 13-1/4" x 39-3/8"
- 5-5/8" application exposure
- ASTM D3462
- ASTM D228
- ASTM D3018 (Type 1)
- ICC-ES AC438
- ASTM D3161 (Class F Wind Resistance)
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- PRI ER 1378E01

**Save 0.5%**  
On Owens Corning  
See page 14

\* See actual warranty for complete details, limitations and requirements.

‡ 40-Year Limited Warranty on commercial projects.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

3) Shingles are algae resistant to help control growth of algae and discoloration.

§ Installation must include use of an approved Owens Corning® Hip & Ridge Shingle product. See actual warranty for details.

4) Owens Corning® Black Sable shingle includes a patented design.

For patent information, please visit [owenscorning.com/patents](http://owenscorning.com/patents)

5) Owens Corning® Bourbon and Midnight Plum shingles include a patent pending design.

**!**  
**ALWAYS**  
SELECT COLOR  
FROM PRODUCT SAMPLES



### A ROOF DOESN'T GET ANY BETTER THAN *DaVinci*

DaVinci offers the beauty of natural slate and cedar shake in different tile options, giving you the ability to meet your customer's aesthetic vision as well as respect their budget.

- ✓ Truly Authentic Appearance
- ✓ Premium Performance
- ✓ Long Life, Low Maintenance
- ✓ Offer the Most Flexibility

**SPECIAL ORDER**



DaVinciRoofscapes.com  
800-328-4624

LIFETIME WARRANTY

CLASS A Fire

CLASS 4 Impact

Gun Nail down to 20° F

Up to 180 MPH High Velocity Hurricane Zone

**Westlake**  
Royal Building Products™

ROOFING SOLUTIONS



**SPECIAL ORDER**

## EcoStar™

Pioneers in sustainable roofing since 1993

### Synthetic Slate, Shake & Flat Tile Roofing

- Superior protection from extreme weather conditions - fire, wind, hail and wind-driven rain
- Made with up to 80% recycled polymer and rubber (not tires)
- Factory-blended available in multi-color and multi-width mix
- Designer Series tiles for ultimate customization
- 50-Year Gold Star Labor and Material Warranty available

800-211-7170 | [www.ecostarllc.com](http://www.ecostarllc.com)

Majestic Niagara Slate in Stormy Gray Blend

Majestic Niagara Shake in Custom Blend





## STARTER, UNDERLAYMENTS, ICE &amp; WATER &amp; SHEATHING, SEALANT

## Starter

### CertainTeed Swiftstart®

Designed for Landmark Series shingles.

116 l.f. CTSWST

### GAF ProStart®

Perforated. Properly-positioned adhesive prevents blow-off.

120 l.f. GAPRST

### GAF Weatherblocker™

Perforated. Properly-positioned adhesive prevents blow-off.

100 l.f. GAWBST

### IKO Leading Edge Plus

Perforated.

123 l.f. IKOLEP40

### MFM Shinglestarter

Self-adhesive, 50-mil membrane. Seal strip prevents wind uplift.

7.2" x 33.5" SHST

### Owens Corning® Starter Strip Plus

Perforated.

105 l.f. OCSTSTPL

## Ice & Water Protection

### CertainTeed WinterGuard

#### Ice & Water Protection

3' x 65' 195 s.f./roll

CTWI

### CertainTeed WinterGuard HT

High-Tack/ High-Temperature

3' x 65' 195 s.f./roll

CTWIHT

### Carlisle WIP

WIP100

3' x 66' 2 sq./roll

WIP300 High Temp

3' x 66' 2 sq./roll

WIPGRIP

3' x 65' 195 s.f./roll

### GAF WeatherWatch®

3' x 66.7' 2 sq/roll GAWW

### GCP Ice & Water Shield

3' x 66' 2 sq/roll GRICWA

### IKO StormTamer

3' x 65' 195 s.f./roll IKOSTTA

### Owens Corning®

#### WeatherLock® Mat

3' x 66.7' 2 sq/roll OCWEMA

## Underlayments

### Raptor Synthetic Underlayment

Incredible traction. Lies flat and stays flat. Six-months exposure.

10' x 100', 10 sq. RASYUN

4' x 250', 10 sq. RASYUN15

SPECIAL ORDER

### CertainTeed RoofRunner

10 sq. CTRORU

### CertainTeed Diamond Deck

Use beneath shingle, shake, metal or slate.

10 sq. CTDIDE

### ESP Low-E ThermaSheet®

Excellent thermal and moisture protection.

5 sq. LOTSHS

### GAF Feltbuster®

10 sq. GAFB

### GAF Tiger Paw™

10 sq. GATIPA

### IKO Stormtite®

10 sq.

### Owens Corning® ProArmor®

Fusion Back Coating technology.

42" x 286', 10 sq. OCPRARUN

SPECIAL ORDER

### RhinoRoof®

U20 4' x 286', 10 sq. TIRHU20

### Titanium®

Exposure up to 6 months.

UDL30 4' x 250', 10 sq. TIUDL

PSU30 3' x 72', 2.16 sq. TIPSU30

### Asphalt Felt

#15 707, 432 s.f. BPRF707

#30 707, 216 s.f. BPRF709

### Continental Ice Belts

Roofing protection underlayment.

33" x 33-1/2" .025 mill

### Through The Roof Sealant

10.5 oz. tube Clear | THRO Black | THROBLAC

Kit inc. 6 10.5 oz. clear tubes, 2 Cobra nozzles, 4 round nozzles

THRO6C

### Plywood & Sheathing

1/2" CDX | 12CDXPI

1/2" Ply Fir | 12CDXFI

7/16" OSB | 716OSB

### Furring Strips

1" x 3" x 8" 13FU

CALL FOR CURRENT PRICING &amp; AVAILABILITY ON ALL WOOD PRODUCTS



## ZIP System® Roof Sheathing

ZIP System® structural roof panels with built-in protective barriers and the specially designed ZIP System™ tape let you say **goodbye to housewrap, clips and felt forever.**

Simply install the panels, tape the seams, and you're done!

ZIP Roofing panels can be used for vertical wall applications, too!



### ZIP Roofing

1/2" x 4' x 8'	12ZIRO	Please call for pricing
5/8" x 4' x 8'	58ZIRO	
5/8" x 4' x 8' Tongue & Groove	58ZIROTG	

### Tapes & Tools

3.75" x 90' Tape (1 roll per 7 ZIP panels)	ZITA
6" x 75' Tape	ZITA6
3.75" ZIP Tape Gun	ZITAGU

### Installs faster & easier

- Installs up to 40% faster than traditional housewraps and felt<sup>1</sup>
- Instant rough dry-in for 180 days
- No more waiting for felt installation. Schedule your subs faster and finish houses more quickly
- Metal roofing and fiber cement siding can be installed directly over ZIP panels

### Eliminates rework

- Protective barriers are built into the panels, eliminating rips and tears typical of traditional felt or housewrap
- ZIP System tape will not blow off or rip underfoot

### Structural 1 Rated

- 1/2" and 5/8" panels

### Differentiates projects

- Jobsites stand out and have a cleaner custom appearance

### Peace of mind

- Limited 30-year system warranty<sup>2</sup>

<sup>1</sup> Based on time studies conducted by an independent third party and 2005 ZIP System builder survey

<sup>2</sup> Limitations and restrictions apply — see zipsystem.com for details

ZIP System Roof is recognized by IBC and IRC (ESR-1473) as a structural roof panel and underlayment all in one, FL DCA Product Approval Number 5930-R1.

zipsystem.com

For ZIP Wall Panels,  
see page 140

STEEP-SLOPE ROOFING




### OmniRoll

30' Length  
Gunnable. Nails included.  
Net-Free Area: 11 sq. in./l.f.  
Tested to 110 mph.  
LOR30



### OmniRidge PRO

4' Length  
Brown in stock  
30 nails included.  
Net-Free Area: 18 sq. in./l.f.  
Tested to 110 mph.  
PRO4SWN



### Lomanco Val-U-Ridge

Net-Free Area: 18 sq. in./l.f.  
Painted Aluminum Ridge Vent  
10' Length VUR10  
Black, Brown, White, Gray, Mill  
End Plug VUREN



### BathPro Vent

Vent, one 8-ft. flexible 4-in. dia. aluminum ducting, two nylon hose clamps, one 3" to 4" neoprene duct adapter, one 4" duct connector  
LOBPK



### Deck Air-4

Ideal as an intake or an exhaust where the roof meets the wall. Net-Free Area 9 sq. in./l.f.  
Shingle over intake or exhaust, 4' Length  
DA4



NEW!



### Lomanco Whirlybird® Turbine Ventilator

Forever guarantee  
(residential installations  
— see warranty for details)  
Mill, Black, Brown  
TULO [BL, BR, MI]

### Adjustable Triangle Louver #905

Net-Free Area: 57-117 sq. in.  
L40WH



### Slant Back Aluminum Vent—The Original!

Net-Free Area: 50 sq. in./l.f.  
Black, White, Brown, Mill, Forest Green, Weathered Bronze L0750



## CERTAINTEED, GAF, OWENS CORNING, AIRVENT: VENTILATION

**Rolled Ridge Vent**

28' Black, filtered  
Net-Free Area: 12 sq. in. /l.f.  
CTROVEFI

**Ridge Vent – 12" Filtered**

4' Black  
Net-Free Area: 18 sq. in. /l.f.  
CTRIVEBL

**Intake Vent**

Improves intake ventilation for all homes and provides intake for homes with little or no overhang  
4' Black  
Net-Free Area: 9 sq. in. /l.f.  
CTINVE

**certainteed**  
SAINT-GOBAIN  
certainteed.com

**Cobra® Intake Vent**

Rooftop intake vent with nails provides critical intake ventilation on homes with limited/no soffits  
11" x 2'. Net-Free Area: 9 sq. in. /l.f.  
GACOIPV

**NEW!****Cobra® Snowcountry® Advanced**

4-foot rigid vent with Snow Guard filter. Perforated in 3" increments. Includes 3" ring shank nails.  
Net-Free Area: 18 sq. in. /l.f.  
GACOVENS

**Cobra® Ridge Vent Nail Gunnable**

20' roll. Includes 1-3/4" coil nails for nail gun installation.  
Net Free Area: 14.1 sq. in. /l.f.  
COVENG

**Cobra® Ridgerunner®**

20' roll. Baffled rigid vent in a roll. Includes 1-3/4" coil nails for nail gun installation.  
Net Free Area: 12.5 sq. in. /l.f.  
GACORR

**GAF**  
gaf.com

**VentSure® 4-Foot Strip Heat & Moisture Ridge Vent**

4-Foot Strip. Black. External Baffle  
Net-Free Area: 20 sq. in. /l.f.  
OCVEST

**VentSure® Rigid Roll Ridge Vent with Weather PROtector® Moisture Barrier**

11-1/4" x 20'  
Net Free Area: 12.5 sq. in. /l.f.  
OCVERO

**OWENS CORNING®**  
owenscorning.com

**AIR VENT INC.**  
airvent.com

**Power Attic Vent**

Power Cool 12 (1170 CFM) with thermostat and humidistat  
AVPC12BL  
Black .

**Aluminum Strip Vent**

8' Length  
Net-Free Area: 12 sq. in. /l.f.  
STVE201 (retro)  
STVE202 (new const.)  
Brown, White

**Bath & Dryer Vent**

Installs as a roof cap or side vent. 4" diameter stem. One-way vent system. Screen is removable for dryer vent application.  
Black RICASTVE

**Pro-Flow® Vented Drip Edge**

Combines venting with a drip edge for proper air intake on homes without soffit.  
10' length. Net-Free Area: 12 sq. in. /l.f.  
White VEDREDWH

**Slantback Plastic Vent**


Net-Free Area: 61 sq. in./per  
AV[xx]PLSL Black, Brown

All prices subject to change. Not responsible for typographical errors.  
See eriematerials.com/updates for major price announcements.

ERIE MATERIALS.COM



# Drip Edge

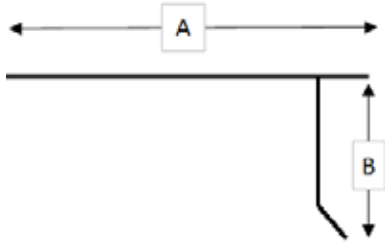


Standard colors: Black, Musket Brown, White

Colors available for certain products and sizes: Almond, Barn Red, Charcoal Gray, Eggshell, Gray, Grecian Green, Royal Brown, Stone Clay, Terra Bronze, Wicker

Item ID	A (in.)	B (in.)	Nominal Thickness (in.)	Material	Length Per Piece (ft)
EDE-1	2 7/16	1 1/8	.019	Aluminum	10
EDE-2	2 7/16	1 5/8	.019	Aluminum	10
EDE0	2 1/2	2	.019	Aluminum	10
EDE-3	2 7/16	1 1/8	29 Gage / .0172	Galvanized	10
EDE-3C	2 3/4	1 1/8	26 Gage / .020	Galvanized	10
EDE-6	2 7/16	1 5/8	29 Gage / .0172	Galvanized	10
EDE-6C	2 3/4	1 7/8	26 Gage / .020	Galvanized	10
EDE-7	4 3/8	1 1/8	29 Gage / .0172	Galvanized	10
EDE-7C	4 5/8	1 5/8	26 Gage / .020	Galvanized	10
EDE-8	4	1 5/8	29 Gage / .0172	Galvanized	10



# Rake Edge

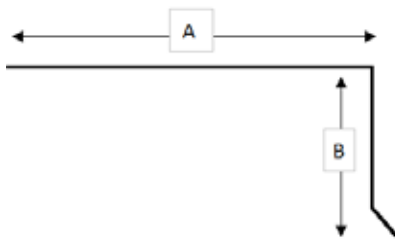

Standard colors: Musket Brown, White

Item ID	A (in.)	B (in.)	Nominal Thickness (in.)	Material	Length Per Piece (ft)
ERA14	3 1/4	1	29 Gage / .0172	Galvanized	10
ERA22	2 1/8	2 1/8	29 Gage / .0172	Galvanized	10
ERAC45	2 5/8	1 1/2	.019	Aluminum	10
ERAC35	1 3/4	1 1/2	.019	Aluminum	10
ERA35	3 1/2	3 1/2	28 Gage / .0187	Galvanized	10



## FLASHINGS

# Flashing

## Aluminum 50' Roll

14"	14ALFL
20"	20ALFL
24"	24ALFL
14" commercial	14ALFLCO
20" commercial	20ALFLCO

## Cold-Rolled Copper 16- & 20-oz. Flat Sheets

2' x 8'	
3' x 8'	Call for other sizes
3' x 10'	

## 1½" Plain-Shank Copper Nails

112CONA	11 ga.
---------	--------

## Garrdal Two-Piece Pipe Flashing

Fits 1-1/2"—5-3/8" GAREPIFL

## Pipe Flashing (Regular Pitch) Aluminum Base

Fits 1-1/4"—4" Pipes 41PIFL	Mill Finish
	41xxPIFL
	Black/Brown
Fits 3"—8" Pipes 38PIFL	Black EPDM

## Electrical Mast Connection

EMCMF	Black EPDM
-------	------------

## Freedom Gray Copper Zinc/ Tin-Coated Flat Sheets

3' x 10' 16 oz and 20 oz IN STOCK  
Other sizes, weights available Special Order

## Soft Copper 100-lb. Roll (16 oz.)

24" x Approx. 50' 24COFL  
Call for quote & other sizes

## Aluminum Step 100-pc. Bundles

3" x 3" x 8" Mill, Brown, Black, White  
6" x 8" Mill, Brown, Black, White

## Pipe Flashing, Copper

Fits 1-1/4"—4" Pipes 41COPIFL

## Pipe Flashing, Rain Collar

Fits 1-1/4"—4" Pipes RC41

## Pipe Flashing (Steep Pitch) ThermoPlastic

Fits 1½"—3" Pipes 31HIRI  
Fits 3"—4" Pipes 34HIRI



## GAF Master Flow Pivot Pipe Boot

The Master Flow™ Pivot™ Pipe Boot Flashing's durable, all-metal design helps provide tough protection with no seals, gaskets, or collars that can degrade and leak when exposed to the elements. Stocked in black.

1-1/2" Inside Diameter	GAMFPB15
3" Inside Diameter	GAMFPB3



NEW